




Egenskaper

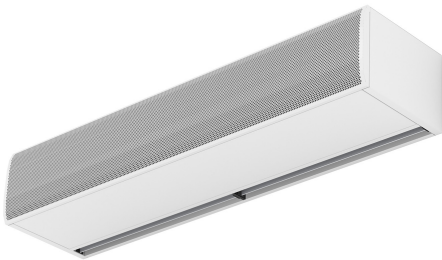

- Specialdesignad för att bli installerade i dörrar i kalla utrymmen och frysdiskar.
- Självständig konstruktion gjord av galvaniserad stål, målad med strukturell vit epoxy-polyesterfärg RAL9016 som standardAndra färger eller rostfritt stål är tillgänglig vid efterfrågan
- Stor fasetterad insugskydd som undviker höga underhållskravFinns också med platta mikroperforerade insugskydd, perfekt för kommersiella dörrar där uppvärmning inte behövs.
- Anodiserad uttag i aluminium, luftfolieformade, går att ställa in mellan 0 till 15° på varje sida
- EC Double-inlet centrifugal fans driven by an external rotor motor and low noise level, with very low consumption efficiency fans.
- "A"-typ utan uppvärmning, endast luft.
- Advanced Plug&Play control. Includes: Advanced PRO control with LCD display and integrated thermostat, door contact, 10m and remote control. With integrated functions: door delay (configurable); interface mode; operation, alarm and maintenance warning signals; and multiple digital inputs that modify the air curtain's operation.
- Includes protective varnish for the electronic board and control.
- Optional:
  - Auxiliary temperature sensors that improve air curtain control and increase energy savings.
  - Clever PRO intelligent control (automatic, programmable, ModBus via PLC, timer, etc.) with an additional temperature sensor.
- Includes varnishing on the PCB to protect it from corrosion.

Specifikationer

50Hz



| ouppvärmd  |        |     |
|------------|--------|-----|
| Modell     | (m³/h) | (m) |
| KBB 1000 A | 5-7    |     |
| KBB 1500 A | 5-7    |     |
| KBB 2000 A | 5-7    |     |
| KBB 2500 A | 5-7    |     |
| KBB 3000 A | 5-7    |     |
| KSB 1000 A | 3,5-5  |     |
| KSB 1500 A | 3,5-5  |     |
| KSB 2000 A | 3,5-5  |     |
| KSB 2500 A | 3,5-5  |     |
| KSB 3000 A | 3,5-5  |     |

60Hz


| ouppvärmd  |        |     |
|------------|--------|-----|
| Modell     | (m³/h) | (m) |
| KSB 1000 A | 3,5-5  |     |
| KSB 1500 A | 3,5-5  |     |
| KSB 2000 A | 3,5-5  |     |
| KSB 2500 A | 3,5-5  |     |
| KSB 3000 A | 3,5-5  |     |



Dimensioner

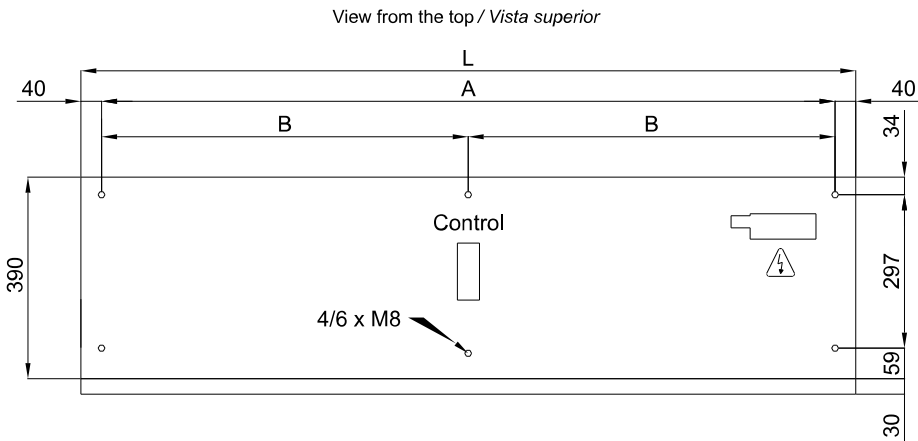

Lateral View / Vista Lateral

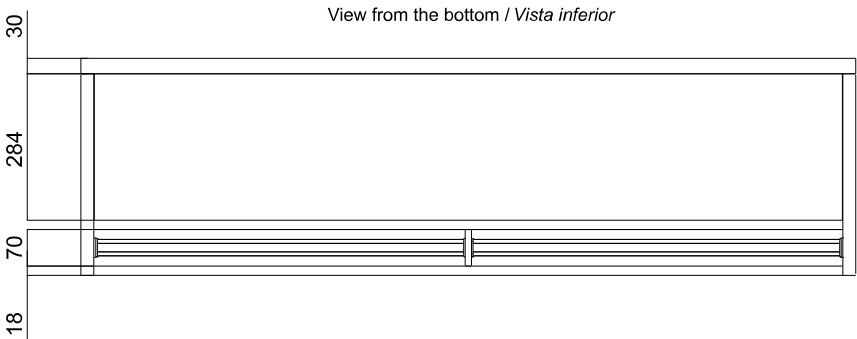

| L    | A    | B    |
|------|------|------|
| 1000 | 920  | -    |
| 1500 | 1420 | 710  |
| 2000 | 1920 | 960  |
| 2500 | 2420 | 1210 |
| 3000 | 2920 | 1460 |